


MRA Digital
 8808 Centre Park Drive, Suite 305
 Columbia, MD 21045
 (240) 447-8803
Certificate of Calibration

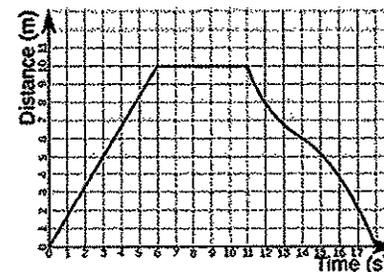

Manufacturer: Vitronic, GmbH

Model: PoliScan^{Speed} M1-HP


Unit Serial Number: PS-642094

This speed measuring device has been tested and verified to be functioning in accordance with the manufacturer's specifications. Testing was performed using equipment traceable to the Office of Legal Metrology of the German State of Hessen.

The calibration testing and verification procedure includes:

- a) Verification of the LIDAR and camera sensor devices by use of a calibrated test stand. The horizontal and vertical beam aperture of the LIDAR as well as beam alignment and signal to noise ratio is verified. The alignment of the optical axis of the cameras with respect to the LIDAR sensor is also verified;
- b) Verify the low-voltage monitoring and correction function (suspends measuring process between 10.3V and 10.7V);
- c) Verify the accuracy of point distance measurements (max. 0.3125m at a distance of 20m) on a test stand;
- d) Verify the accuracy of the internal time base using a calibrated stop watch (max. deviation 0.3%, e.g. 5.4 seconds per 30 minutes).


The device meets all requirements and tolerances specified in the manufacturer's technical directives for calibration checking. The calibration check was performed under the direction of **Heinz Stubblefield**, who has been certified to calibrate Vitronic PoliScan^{Speed} devices.

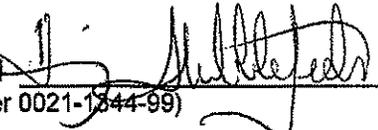Signed, Heinz Stubblefield 
 (FCC License Number 0021-1844-99)


Date: February 23, 2012

Certification Expiration: February 22, 2013^[1]

[1] The validity of the calibration expires immediately if any official seals of the calibration on the device are broken or any mechanical, electrical or software modifications are made after this calibration.

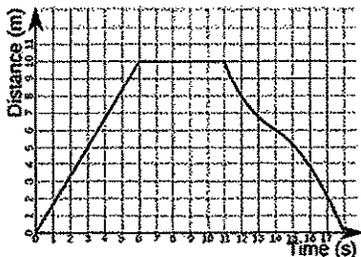

MRA Digital
 8808 Centre Park Drive, Suite 305
 Columbia, MD 21045
 (240) 447-8803
Certificate of Calibration

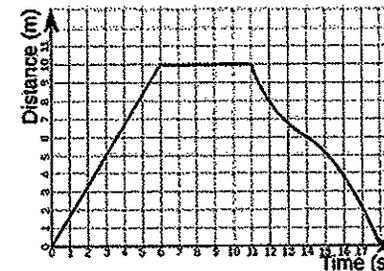

Manufacturer: Vitronic, GmbH

Model: PoliScan^{Speed} M1-HP


Unit Serial Number: PS-643816

This speed measuring device has been tested and verified to be functioning in accordance with the manufacturer's specifications. Testing was performed using equipment traceable to the Office of Legal Metrology of the German State of Hessen.

The calibration testing and verification procedure includes:

- a) Verification of the LIDAR and camera sensor devices by use of a calibrated test stand. The horizontal and vertical beam aperture of the LIDAR as well as beam alignment and signal to noise ratio is verified. The alignment of the optical axis of the cameras with respect to the LIDAR sensor is also verified;
- b) Verify the low-voltage monitoring and correction function (suspends measuring process between 10.3V and 10.7V);
- c) Verify the accuracy of point distance measurements (max. 0.3125m at a distance of 20m) on a test stand;
- d) Verify the accuracy of the internal time base using a calibrated stop watch (max. deviation 0.3%, e.g. 5.4 seconds per 30 minutes).


The device meets all requirements and tolerances specified in the manufacturer's technical directives for calibration checking. The calibration check was performed under the direction of **Heinz Stubblefield**, who has been certified to calibrate Vitronic PoliScan^{Speed} devices.

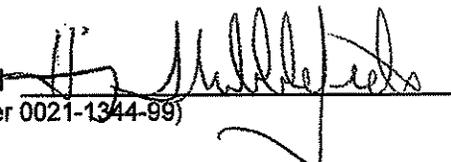Signed, Heinz Stubblefield 
 (FCC License Number 0021-1344-99)


Date: February 29, 2012

Certification Expiration: February 28, 2013^[1]

[1] The validity of the calibration expires immediately if any official seals of the calibration on the device are broken or any mechanical, electrical or software modifications are made after this calibration.

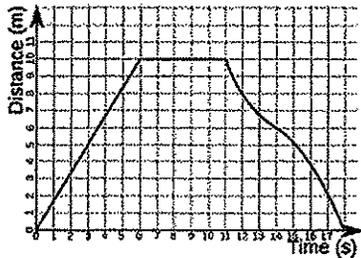

MRA Digital
 8808 Centre Park Drive, Suite 305
 Columbia, MD 21045
 (240) 447-8803
Certificate of Calibration

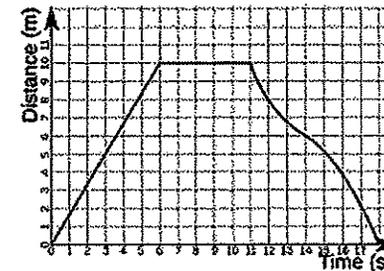

Manufacturer: Vitronic, GmbH

Model: PoliScan^{Speed} M1-HP


Unit Serial Number: PS-642101

This speed measuring device has been tested and verified to be functioning in accordance with the manufacturer's specifications. Testing was performed using equipment traceable to the Office of Legal Metrology of the German State of Hessen.

The calibration testing and verification procedure includes:

- a) Verification of the LIDAR and camera sensor devices by use of a calibrated test stand. The horizontal and vertical beam aperture of the LIDAR as well as beam alignment and signal to noise ratio is verified. The alignment of the optical axis of the cameras with respect to the LIDAR sensor is also verified;
- b) Verify the low-voltage monitoring and correction function (suspends measuring process between 10.3V and 10.7V);
- c) Verify the accuracy of point distance measurements (max. 0.3125m at a distance of 20m) on a test stand;
- d) Verify the accuracy of the internal time base using a calibrated stop watch (max. deviation 0.3%, e.g. 5.4 seconds per 30 minutes).


The device meets all requirements and tolerances specified in the manufacturer's technical directives for calibration checking. The calibration check was performed under the direction of **Heinz Stubblefield**, who has been certified to calibrate Vitronic PoliScan^{Speed} devices.

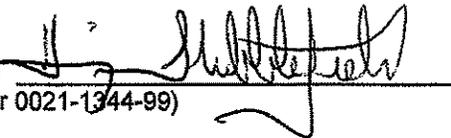Signed, Heinz Stubblefield 
 (FCC License Number 0021-1344-99)


Date: February 22, 2012

Certification Expiration: February 21, 2013^[1]

[1] The validity of the calibration expires immediately if any official seals of the calibration on the device are broken or any mechanical, electrical or software modifications are made after this calibration.

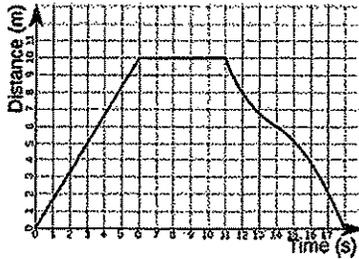

MRA Digital
 8808 Centre Park Drive, Suite 305
 Columbia, MD 21045
 (240) 447-8803
Certificate of Calibration

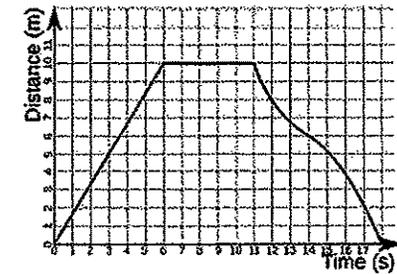

Manufacturer: Vitronic, GmbH

Model: PoliScan^{Speed} M1-HP

Unit Serial Number: PS-642102

This speed measuring device has been tested and verified to be functioning in accordance with the manufacturer's specifications. Testing was performed using equipment traceable to the Office of Legal Metrology of the German State of Hessen.

The calibration testing and verification procedure includes:

- a) Verification of the LIDAR and camera sensor devices by use of a calibrated test stand. The horizontal and vertical beam aperture of the LIDAR as well as beam alignment and signal to noise ratio is verified. The alignment of the optical axis of the cameras with respect to the LIDAR sensor is also verified;
- b) Verify the low-voltage monitoring and correction function (suspends measuring process between 10.3V and 10.7V);
- c) Verify the accuracy of point distance measurements (max. 0.3125m at a distance of 20m) on a test stand;
- d) Verify the accuracy of the internal time base using a calibrated stop watch (max. deviation 0.3%, e.g. 5.4 seconds per 30 minutes).


The device meets all requirements and tolerances specified in the manufacturer's technical directives for calibration checking. The calibration check was performed under the direction of **Heinz Stubblefield**, who has been certified to calibrate Vitronic PoliScan^{Speed} devices.

Signed, Heinz Stubblefield
 (FCC License Number 0021-1344-99)


Date: February 22, 2012

Certification Expiration: February 21, 2013^[1]

[1] The validity of the calibration expires immediately if any official seals of the calibration on the device are broken or any mechanical, electrical or software modifications are made after this calibration.

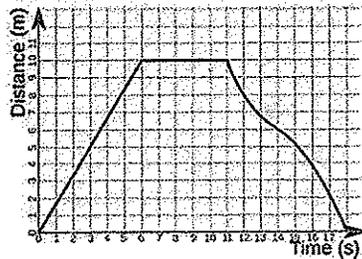

MRA Digital
 8808 Centre Park Drive, Suite 305
 Columbia, MD 21045
 (240) 447-8803
Certificate of Calibration

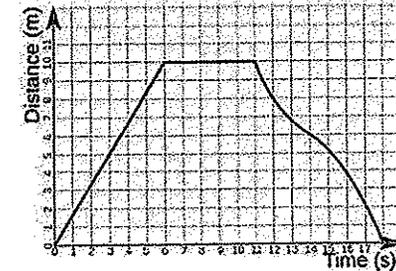

Manufacturer: Vitronic, GmbH

Model: PoliScan^{Speed} M1-HP


Unit Serial Number: PS-643817

This speed measuring device has been tested and verified to be functioning in accordance with the manufacturer's specifications. Testing was performed using equipment traceable to the Office of Legal Metrology of the German State of Hessen.

The calibration testing and verification procedure includes:

- a) Verification of the LIDAR and camera sensor devices by use of a calibrated test stand. The horizontal and vertical beam aperture of the LIDAR as well as beam alignment and signal to noise ratio is verified. The alignment of the optical axis of the cameras with respect to the LIDAR sensor is also verified;
- b) Verify the low-voltage monitoring and correction function (suspends measuring process between 10.3V and 10.7V);
- c) Verify the accuracy of point distance measurements (max. 0.3125m at a distance of 20m) on a test stand;
- d) Verify the accuracy of the internal time base using a calibrated stop watch (max. deviation 0.3%, e.g. 5.4 seconds per 30 minutes).


The device meets all requirements and tolerances specified in the manufacturer's technical directives for calibration checking. The calibration check was performed under the direction of **Heinz Stubblefield**, who has been certified to calibrate Vitronic PoliScan^{Speed} devices.

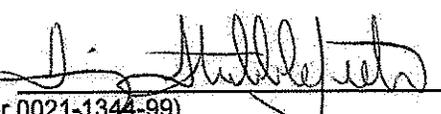Signed, Heinz Stubblefield 
 (FCC License Number 0021-1344-99)


Date: April 20, 2012

Certification Expiration: April 19, 2013^[1]

[1] The validity of the calibration expires immediately if any official seals of the calibration on the device are broken or any mechanical, electrical or software modifications are made after this calibration.

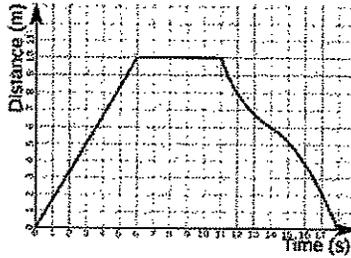

MRA Digital
 8808 Centre Park Drive, Suite 305
 Columbia, MD 21045
 (240) 447-8803
Certificate of Calibration

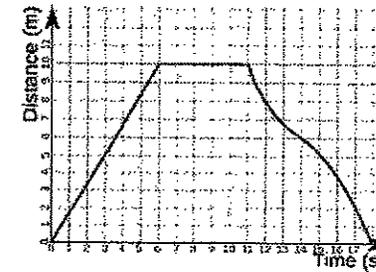

Manufacturer: Vitronic, GmbH

Model: PoliScan^{Speed} M1-HP

Unit Serial Number: PS-647937

This speed measuring device has been tested and verified to be functioning in accordance with the manufacturer's specifications. Testing was performed using equipment traceable to the Office of Legal Metrology of the German State of Hessen.

The calibration testing and verification procedure includes:

- Verification of the LIDAR and camera sensor devices by use of a calibrated test stand. The horizontal and vertical beam aperture of the LIDAR as well as beam alignment and signal to noise ratio is verified. The alignment of the optical axis of the cameras with respect to the LIDAR sensor is also verified;
- Verify the low-voltage monitoring and correction function (suspends measuring process between 10.3V and 10.7V);
- Verify the accuracy of point distance measurements (max. 0.3125m at a distance of 20m) on a test stand;
- Verify the accuracy of the internal time base using a calibrated stop watch (max. deviation 0.3%, e.g. 5.4 seconds per 30 minutes).


The device meets all requirements and tolerances specified in the manufacturer's technical directives for calibration checking. The calibration check was performed under the direction of **Heinz Stubblefield**, who has been certified to calibrate Vitronic PoliScan^{Speed} devices.

Signed, Heinz Stubblefield
 (FCC License Number 0021-4344-99)


Date: March 30, 2012

Certification Expiration: March 29, 2013^[1]

[1] The validity of the calibration expires immediately if any official seals of the calibration on the device are broken or any mechanical, electrical or software modifications are made after this calibration.

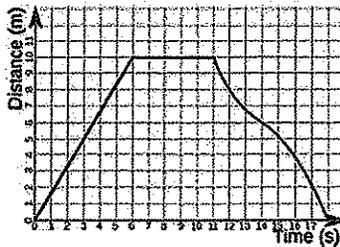

MRA Digital
 8808 Centre Park Drive, Suite 305
 Columbia, MD 21045
 (240) 447-8803
Certificate of Calibration

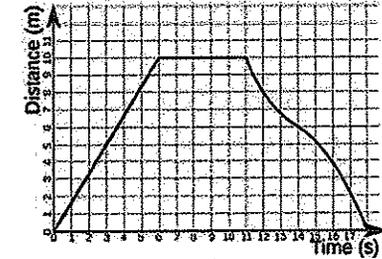

Manufacturer: Vitronic, GmbH

Model: PoliScan^{Speed} M1-HP

Unit Serial Number: PS-642103

This speed measuring device has been tested and verified to be functioning in accordance with the manufacturer's specifications. Testing was performed using equipment traceable to the Office of Legal Metrology of the German State of Hessen.

The calibration testing and verification procedure includes:

- a) Verification of the LIDAR and camera sensor devices by use of a calibrated test stand. The horizontal and vertical beam aperture of the LIDAR as well as beam alignment and signal to noise ratio is verified. The alignment of the optical axis of the cameras with respect to the LIDAR sensor is also verified;
- b) Verify the low-voltage monitoring and correction function (suspends measuring process between 10.3V and 10.7V);
- c) Verify the accuracy of point distance measurements (max. 0.3125m at a distance of 20m) on a test stand;
- d) Verify the accuracy of the internal time base using a calibrated stop watch (max. deviation 0.3%, e.g. 5.4 seconds per 30 minutes).


The device meets all requirements and tolerances specified in the manufacturer's technical directives for calibration checking. The calibration check was performed under the direction of **Heinz Stubblefield**, who has been certified to calibrate Vitronic PoliScan^{Speed} devices.

Signed, Heinz Stubblefield 
 (FCC License Number 0021-1344-99)


Date: April 20, 2012

Certification Expiration: April 19, 2013^[1]

[1] The validity of the calibration expires immediately if any official seals of the calibration on the device are broken or any mechanical, electrical or software modifications are made after this calibration.

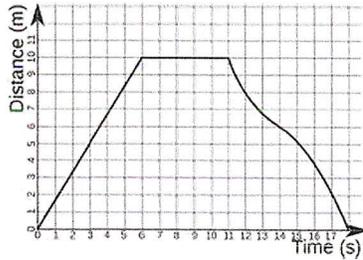

MRA Digital
 8808 Centre Park Drive, Suite 305
 Columbia, MD 21045
 (240) 447-8803
Certificate of Calibration

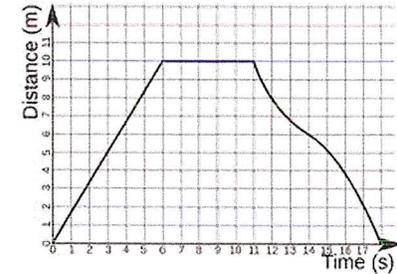

Manufacturer: Vitronic, GmbH

Model: PoliScan^{Speed} M1-HP


Unit Serial Number: PS-647919

This speed measuring device has been tested and verified to be functioning in accordance with the manufacturer's specifications. Testing was performed using equipment traceable to the Office of Legal Metrology of the German State of Hessen.

The calibration testing and verification procedure includes:

- a) Verification of the LIDAR and camera sensor devices by use of a calibrated test stand. The horizontal and vertical beam aperture of the LIDAR as well as beam alignment and signal to noise ratio is verified. The alignment of the optical axis of the cameras with respect to the LIDAR sensor is also verified;
- b) Verify the low-voltage monitoring and correction function (suspends measuring process between 10.3V and 10.7V);
- c) Verify the accuracy of point distance measurements (max. 0.3125m at a distance of 20m) on a test stand;
- d) Verify the accuracy of the internal time base using a calibrated stop watch (max. deviation 0.3%, e.g. 5.4 seconds per 30 minutes).


The device meets all requirements and tolerances specified in the manufacturer's technical directives for calibration checking. The calibration check was performed under the direction of **Heinz Stubblefield**, who has been certified to calibrate Vitronic PoliScan^{Speed} devices.

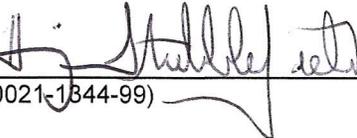Signed, Heinz Stubblefield 
 (FCC License Number 0021-1344-99)


Date: July 13, 2012

Certification Expiration: July 12, 2013^[1]

[1] The validity of the calibration expires immediately if any official seals of the calibration on the device are broken or any mechanical, electrical or software modifications are made after this calibration.

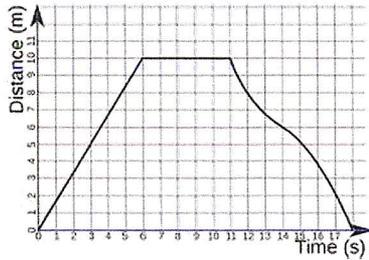

MRA Digital
 8808 Centre Park Drive, Suite 305
 Columbia, MD 21045
 (443) 367-3434
Certificate of Calibration

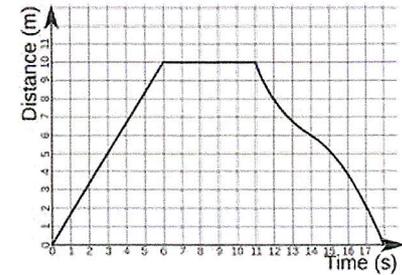

Manufacturer: Vitronic, GmbH

Model: PoliScan^{Speed} M1-HP


Unit Serial Number: PS-648214

This speed measuring device has been tested and verified to be functioning in accordance with the manufacturer's specifications. Testing was performed using equipment traceable to the Office of Legal Metrology of the German State of Hessen.

The calibration testing and verification procedure includes:

- a) Verification of the LIDAR and camera sensor devices by use of a calibrated test stand. The horizontal and vertical beam aperture of the LIDAR as well as beam alignment and signal to noise ratio is verified. The alignment of the optical axis of the cameras with respect to the LIDAR sensor is also verified;
- b) Verify the low-voltage monitoring and correction function (suspends measuring process between 10.0V and 11.0V);
- c) Verify the accuracy of point distance measurements (max. 0.3000m at a distance of 20m) on a test stand;
- d) Verify the accuracy of the internal time base using a calibrated stop watch (max. deviation 0.3%, e.g. 5.4 seconds per 30 minutes).

The device meets all requirements and tolerances specified in the manufacturer's technical directives for calibration checking. The calibration check was performed under the direction of **Heinz Stubblefield**, who has been certified to calibrate Vitronic PoliScan^{Speed} devices.

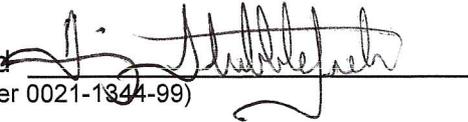Signed, Heinz Stubblefield 
 (FCC License Number 0021-1844-99)

Date: August 10, 2012

Certification Expiration: August 9, 2013^[1]

[1] The validity of the calibration expires immediately if any official seals of the calibration on the device are broken or any mechanical, electrical or software modifications are made after this calibration.